

# MOMENTO ePROOF SYSTEM

 **momento**


# MOMENTO **ISOLATED** POWER ADAPTERS

SAFETY AND  
PROTECTION  
@ WORK

Momento ePROOF SYSTEM Insulated/Isolated Adapters provide protection against electrostatic discharge up to 1000V, reducing risks associated with high currents, live components, short-circuits, and grounding with tools.

All our ePROOF SYSTEM adapters have been tested for your safety. With Momento you can work with confidence, knowing that our isolated power adapters are designed to protect you from electrical shock hazards. Our commitment to safety is unwavering, and our products are engineered to meet the most stringent industry standards. From electrical engineers to technicians, our power adapters are trusted by professionals worldwide.

## MOMENTO ePROOF SYSTEM




The tools have a composite shell to delete all electric conductivity. The isolated power adapter can be combined with the Silverline™ cover sockets, and the gap cover for a fully integrated system by free-rotating sleeves.




# SAFETY

Each individual adapter is tested in-house and comes with a signed certificate. By combining our isolated adapters with our silverline impact socket, you can ensure that you have the protection you need to work safely and effectively.

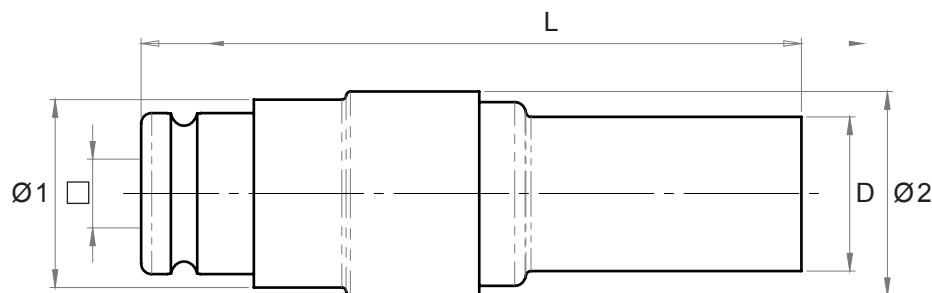

## ISOLATED ADAPTER

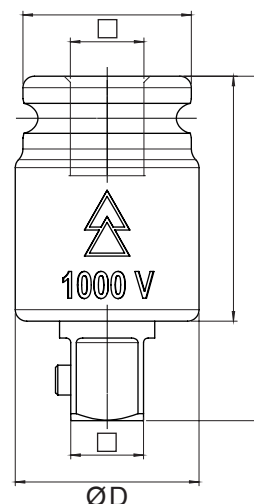

## ePROOF SYSTEM

ART.NR.	A/F SIZE	D (mm)	L (mm)	Ø 1	Ø 2	SQUARE
SI0-5	5	13	57	24	19,5	1/4"
SI0-6	6	14	57	24	19,5	1/4"
SI0-7	7	15	57	24	19,5	1/4"
SI0-8	8	16,5	57	24	19,5	1/4"
SI0-5L	5	13	89	24	19,5	1/4"
SI0-6L	6	14	89	24	19,5	1/4"
SI0-7L	7	15	89	24	19,5	1/4"
SI0-8L	8	16,5	89	24	19,5	1/4"

ART.NR.	A/F SIZE	D (mm)	L (mm)	Ø 1	Ø 2	SQUARE
SI1-6	6	14	69	29	26	3/8"
SI1-7	7	16	69	29	26	3/8"
SI1-8	8	18	69	29	26	3/8"
SI1-9	9	19	69	29	26	3/8"
SI1-10	10	20	69	29	26	3/8"
SI1-11	11	22	69	29	26	3/8"
SI1-12	12	23	69	29	26	3/8"
SI1-6L	6	14	92	29	26	3/8"
SI1-7L	7	16	92	29	26	3/8"
SI1-8L	8	18	92	29	26	3/8"
SI1-9L	9	19	92	29	26	3/8"
SI1-10L	10	20	92	29	26	3/8"
SI1-11L	11	22	92	29	26	3/8"
SI1-12L	12	23	92	29	26	3/8"
SI1-13	13	24	69	29	29	3/8"
SI1-14	14	25	69	29	29	3/8"
SI1-13L	13	24	92	29	29	3/8"
SI1-14L	14	25	92	29	29	3/8"

ART.NR.	A/F SIZE	D (mm)	L (mm)	Ø 1	Ø 2	SQUARE
SI4-6	6	16	80	35	33	1/2"
SI4-7	7	17	80	35	33	1/2"
SI4-8	8	19	80	35	33	1/2"
SI4-9	9	20	80	35	33	1/2"
SI4-10	10	21	80	35	33	1/2"
SI4-11	11	23	80	35	33	1/2"
SI4-12	12	24	80	35	33	1/2"
SI4-13	13	25	80	35	33	1/2"
SI4-14	14	27	80	35	33	1/2"
SI4-6L	6	16	123	35	33	1/2"
SI4-7L	7	17	123	35	33	1/2"
SI4-8L	8	19	123	35	33	1/2"
SI4-9L	9	20	123	35	33	1/2"
SI4-10L	10	21	123	35	33	1/2"
SI4-11L	11	23	123	35	33	1/2"
SI4-12L	12	24	123	35	33	1/2"
SI4-13L	13	25	123	35	33	1/2"
SI4-14L	14	27	123	35	33	1/2"
SI4-15	15	28	80	35	38	1/2"
SI4-16	16	29	80	35	38	1/2"
SI4-15L	15	28	123	35	38	1/2"
SI4-16L	16	29	123	35	38	1/2"

## ISOLATED ADAPTER

ADAPTER	SQUARE	d (mm)	D (mm)	L (mm)	L1 (mm)	Nm
SI00	1/4"	16	19	39	30	30
SI11	3/8"	22	24	45	32	110
SI44	1/2"	30	30	55	37	220


**WARNING: ELECTRICAL ISOLATION DEVICE** Provides protection against electrical faults and shock hazards up to 1000V. Ensure correct installation and regular inspection. Warranty and safety compliance are void if the product is altered, modified, or repaired by unauthorized individuals. Use only as directed, follow manufacturer guidelines, and do not disassemble or tamper with any components. Do not use if you notice any irregularities, damage, or unusual behavior in operation. Do not store in direct sunlight.



Tested and certified according to applicable clauses in SS-EN IEC 60900

## EXPERIENCE THE PEACE OF MIND THAT COMES WITH USING MOMENTO'S **ISOLATED** POWER ADAPTERS. – THE SAFEST CHOICE.

This quality approval comes with every individual isolated power adapter.

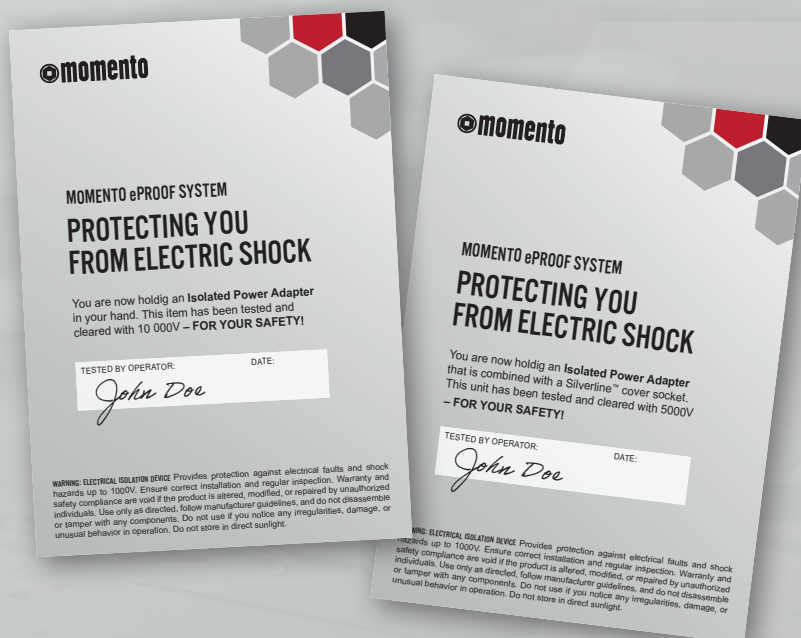

**MOMENTO**  
P.O. Box 14  
SE-642 21 Flen  
Sweden

VISITING ADDRESS  
Kungsvägen 68  
SE-642 34 Flen  
Sweden

CONTACT US  
+46 157-690 00  
info@momento.se  
www.momento.se